


**Castleguard**® is specifically formulated to counter the high labor costs associated with hard floor care. This floor finish has provided savings of 30% and more! How? **Castleguard** is non-yellowing and non-powdering, which extends your strip cycle and saves many labor hours. **Castleguard** is extremely durable...it resists scuff marks and looks great month after month, even with extremely heavy traffic.

One coat of **Castleguard** equals two coats of most conventional floor finishes. **Castleguard** may be applied to virtually all hard floor surfaces to provide beauty and protection beyond your expectations.

**Castleguard**'s exceptional depth of gloss brings out the hidden beauty of your floors with a "wet look." Its slip-resistant surface promotes safety. See for yourself why supermarkets, retail stores, hospitals, schools and building service contractors call **Castleguard** the "best floor finish in the world."

# The King of Floor Finishes™



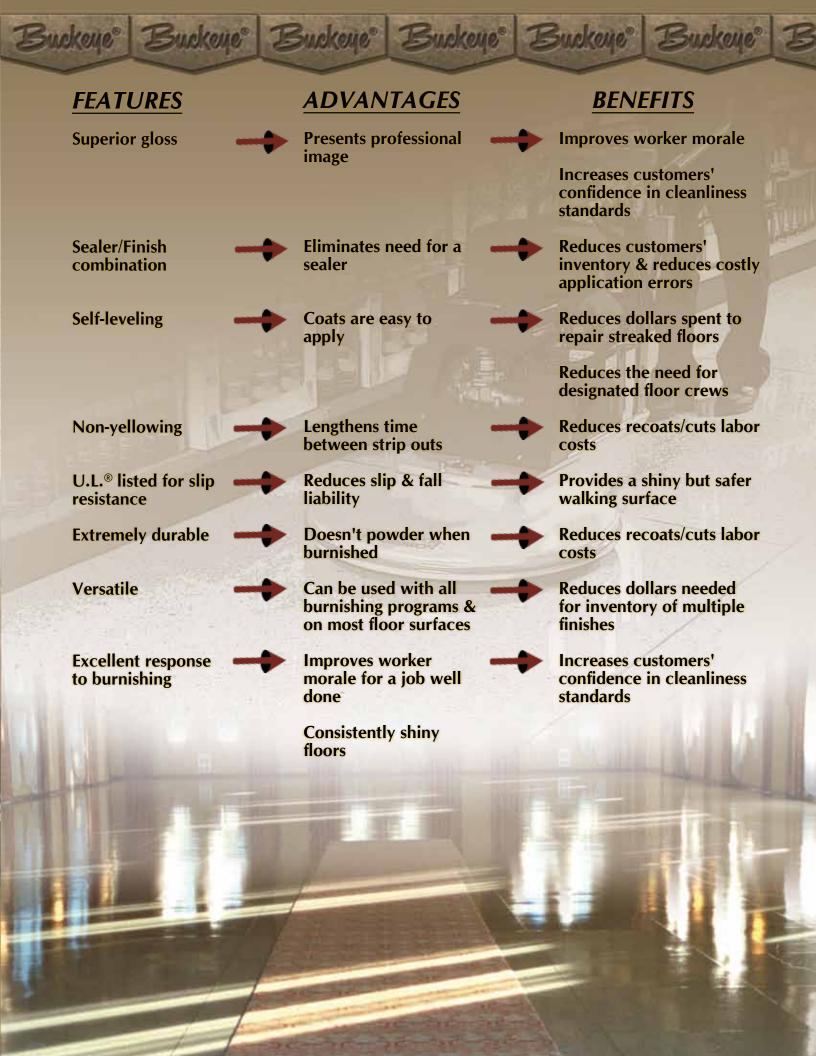

## **DIRECTIONS FOR USE:**

#### **Preparation:**

- 1. Strip floor thoroughly using the appropriate Buckeye stripper.
- 2. Rinse floor with clear water, changing rinse water frequently to prevent redepositing of dirt and stripper residue.
- 3. Allow floor to dry thoroughly before applying Castleguard.

#### **Application:**

- 1. Use a clean rayon mop and clean bucket.
- 2. Saturate mop with Castleguard.
- 3. Press mop into wringer to remove excess finish. Do not wring mop.
- 4. Apply **Castleguard**. Best results may be attained by applying medium to full coats.
- 5. Allow each coat to dry 20 minutes under normal room conditions.

#### **Maintenance:**

Hq

- 1. Dust mop floors with an Aqua Dust™ treated mop.
- 2. Damp mop as required using Buckeye Blue, Straight-Up®, or Crossbow®.

#### Available in:



5-gallon Action Pacs<sup>®</sup> 30-gallon drums 55-gallon drums

8.0 + 0.2

8.58 lb

260-gallon Mega Pacs™

# **Technical Specifications**

Weight/Gallon
Sediment (based on volume)
Film Color
Odor
Flash Point
Heat Stability

Bland
None
Over 30 days @ 125<sup>0</sup> F

Freeze-Thaw Stability Storage Stability Slip Resistance Pass 3 Cycles Excellent\* U.L. Classified

Less than 0.1%

**Water Clear** 

FLOOR COATING AND MATERIAL AS TO SEIP RESISTANCE

\*stored in its original unopened container

### **Buckeye International, Inc.**